

GENERATOR SET


Power Ratings

Voltage, Frequency	PRP	ESP
400V, 50Hz cosφ = 0.8	300kVA / 240kW	330kVA / 264kW
Engine Make / Model :	FPT - C87TE4	
Generator Make / Model :	Leroy Somer - TAL046F	
Control Panel :	ComAp AMF 9 Lite	
Charge Alternator [V / A] :	28 / 90	
Battery Charger [V / A] :	24 / 5	
Battery / Capacity [V / Ah] :	2 x (12 / 150)	
Block Water Heater [W] :	1500	
ATS Model / Length x Width x Height * :	500A / 750x750x300	

Fuel Consumption

Load	110%	100%	75%	50%
[lt / h]	72,4	66,6	52,6	37,3
Fuel Tank Capacity [lt] : Open skid / Canopied :	380 / 385			

Based on diesel fuel with a specific gravity of 0.85 and conforming to TS EN590 Class A2

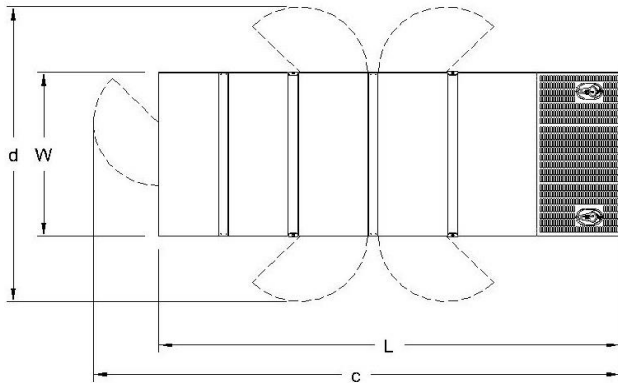

Diesel Engine

Manufacturer :	FPT
Engine Model :	C87TE4
No. of Cylinders / Alignment :	6 / Inline
Bore / Stroke [mm] :	117 / 135
Compression Ratio :	15,9 : 1
Displacement [lt] :	8,7
Engine Speed [rpm] :	1500
Gross Engine Power ESP / PRP [kW] :	305 / 281

Generator

Manufacturer :	Leroy Somer
Alternator Model :	TAL046F
Bearings Type :	Single
Insulation Class :	H
Winding Pitch :	2/3
No. of Wires Terminal :	6
Frequency / Poles :	50Hz / 4p
Voltage (Ph-Ph / Ph-N) :	400V / 230V
Output Power (163°C / 27°C) :	330kVA / 264kW

Prime Power (PRP)

A Prime rated generator set is capable of providing power to a varying load for an unlimited number of hours per year. Ten percent overload is allowed at one in 12 hours.

Emergency Standby Power (ESP)

A Standby rated generator set is capable of providing max. power to a varying load for 200 hours per year. No overload is allowed.

Standard Reference Conditions

A specified values are given for 25°C ambient temperature, 100m above sea level and 30% relative humidity.

Dimensions & Weights

L x W x H (mm) / c x d (mm) Wet (kg)


Canopy : 3400X1400X2150 / TBA 3090

L x W x H (mm) / a x b x h (mm) Wet (kg)

W/O Canopy : 2700X1250X1800 / 1000 x 940 x 620 2540

Dry = Without any liquid

Wet = With lube oil, coolant and fuel

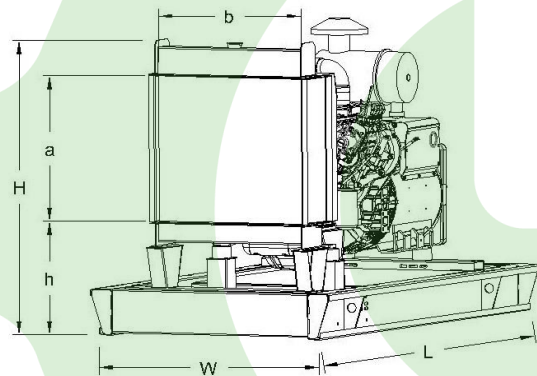

Air Intake System :	Turbocharged & Aftercooled
Governor Type / Class 8528 :	Electronic / G2
Total Oil Capacity [lt] :	28
Oil Type :	API CI-4, CH4/ 15W-40
Cooling System Capacity [lt] :	58
Recommended Fuel :	TS EN590, Class A2 Diesel
Emissions Compliance :	Fuel Optimized
Housing - Flywheel :	1-14

Regulation Type / Model :	AVR / R150
Protection Class :	IP23
Efficiency (Pf 0,8 Prime) :	92.3%
Voltage Regulation (Steady State) :	± 1.0%
THD (Total Harmonic Distortion) :	< 2,5% w/o load/ < 5 % on load
15%	265kVA
Voltage Dip. 25%	505kVA
30%	650kVA

f = 50Hz, Voltage dip is given for Locked rotor at P.F.=0.6 .