

GENERATOR SET

Power Ratings

Voltage, Frequency	PRP	ESP
400V, 50Hz cosφ = 0.8	50kVA / 40kW	55kVA / 44kW


Engine Make / Model :	FPT - N45AM2
Generator Make / Model :	Leroy Somer - TAL042G
Control Panel :	ComAp AMF 9 Lite
Charge Alternator [V / A] :	14 / 90
Battery Charger [V / A] :	12 / 5
Battery / Capacity [V / Ah] :	1 x (12V / 72Ah)
Block Water Heater [W] :	500 W
ATS Model / Length x Width x Height * :	80A / 550x450x200

Fuel Consumption

Load	110%	100%	75%	50%
[lt / h]	14,6	11,6	9,8	6,2

Fuel Tank Capacity [lt] : Open skid / Canopied : 150 / 140

Based on diesel fuel with a specific gravity of 0.85 and conforming to TS EN590 Class A2

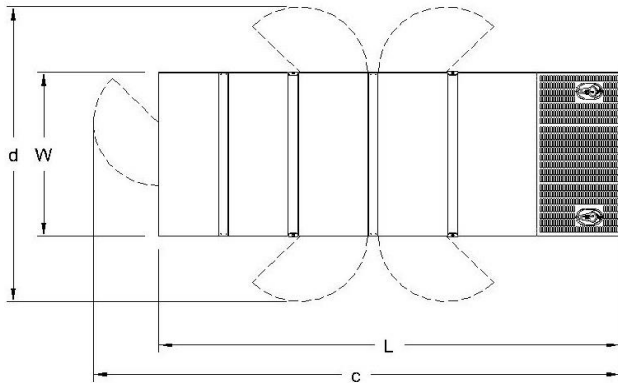

Diesel Engine

Manufacturer :	FPT
Engine Model :	N45AM2
No. of Cylinders / Alignment :	4L
Bore / Stroke [mm] :	104 / 132
Compression Ratio :	17,5 : 1
Displacement [lt] :	4,5
Engine Speed [rpm] :	1500
Gross Engine Power ESP / PRP [kW] :	51 / 46,5

Generator

Manufacturer :	Leroy Somer
Alternator Model :	TAL042G
Bearings Type :	Single
Insulation Class :	H
Winding Pitch :	2/3
No. of Wires Terminal :	6
Frequency / Poles :	50Hz / 4p
Voltage (Ph-Ph / Ph-N) :	400V / 230V
Output Power (163°C / 27°C) :	55kVA / 44kW

Prime Power (PRP)

A Prime rated generator set is capable of providing power to a varying load for an unlimited number of hours per year. Ten percent overload is allowed at one in 12 hours.

Emergency Standby Power (ESP)

A Standby rated generator set is capable of providing max. power to a varying load for 200 hours per year. No overload is allowed.

Standard Reference Conditions

A specified values are given for 25°C ambient temperature, 100m above sea level and 30% relative humidity.

Dimensions & Weights

	L x W x H (mm) / c x d (mm)	Wet (kg)
--	-----------------------------	----------


Canopy :	2350X1100X1730 / TBA	1065
----------	----------------------	------

	L x W x H (mm) / a x b x h (mm)	Wet (kg)
--	---------------------------------	----------

W/O Canopy :	1850X900X1280 / 460 x 500 x 700	795
--------------	---------------------------------	-----

Dry = Without any liquid

Wet = With lube oil, coolant and fuel

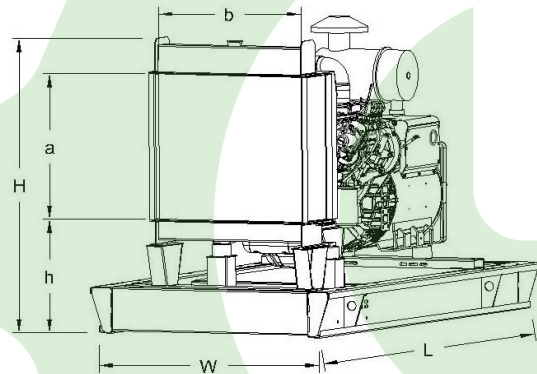

Air Intake System :	Natural Aspirated
Governor Type / Class 8528 :	Electronic
Total Oil Capacity [lt] :	12,8
Oil Type :	API CI-4, CH4/ 15W-40
Cooling System Capacity [lt] :	10
Recommended Fuel :	TS EN590, Class A2 Diesel
Emissions Compliance :	N/A
Housing - Flywheel :	SAE3/11,5

Regulation Type / Model :	AVR / R120
Protection Class :	IP23
Efficiency (Pf 0,8 Prime) :	89,4%
Voltage Regulation (Steady State) :	± 1.0%
THD (Total Harmonic Distortion) :	< 2% w/o load/ < 5 % on load
	15% 30kVA
Voltage Dip.	25% 58kVA
	30% 72kVA

f = 50Hz, Voltage dip is given for Locked rotor at P.F.=0.6 .